





PT. BANGUN BERKAT BERSAMA

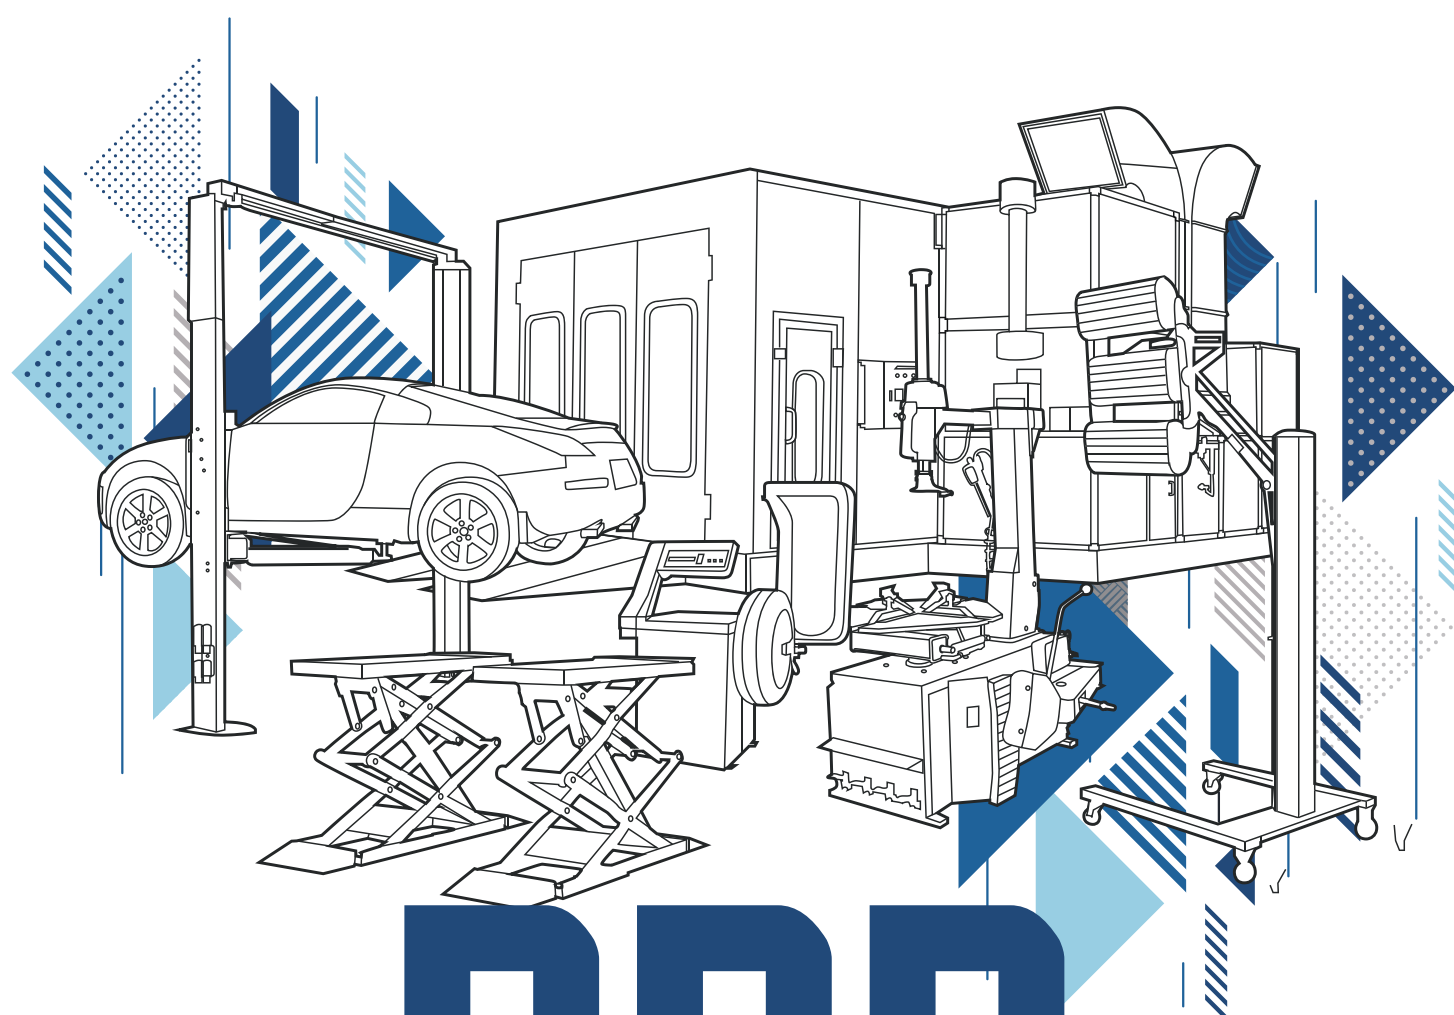

BBB

CAT
ALO
GUE



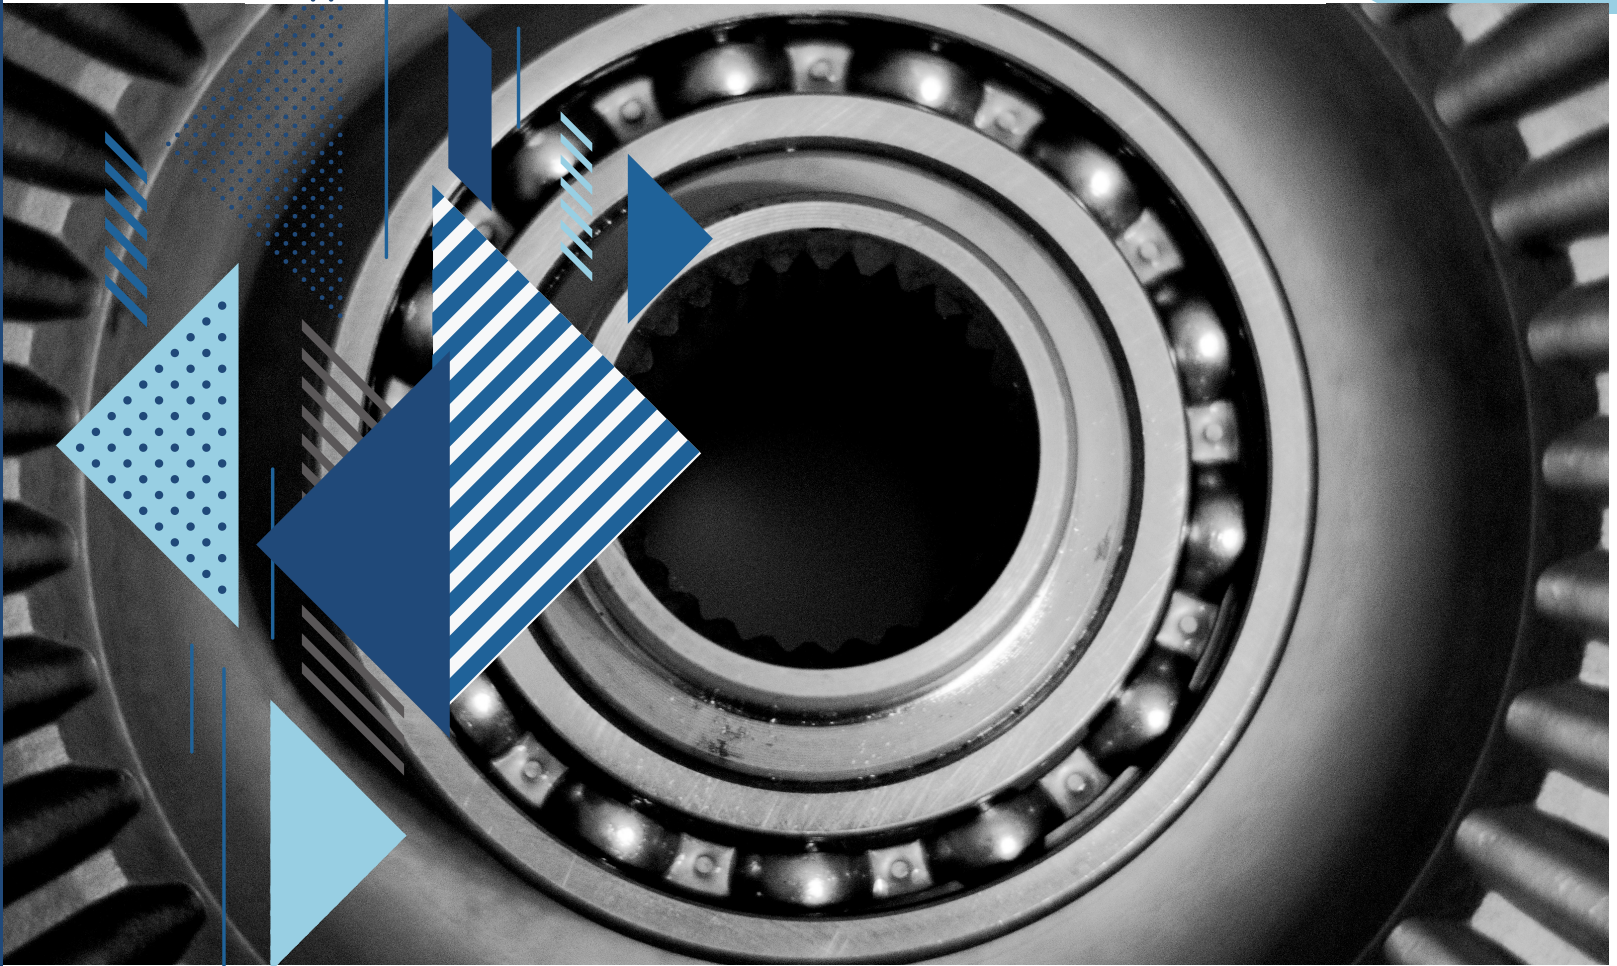

ABOUT US

PT Bangun Berkata Bersama bergerak di bidang industri yang mensuplai alat-alat automotive, yang berkembang sejak 2003. Tahun 2008, PT Bangun Berkata Bersama telah terdaftar sebagai vendor peralatan pada Astra Internasional. Untuk pengembangan ke arah yang signifikan, PT Bangun Berkata Bersama terus membarui sistem, tim manajemen, dan menjalin kerjasama dengan vendor lainnya.

Established in 2003, PT Bangun Berkata Bersama has managed a business in automotive industries which supplies the automotive equipment. In 2008, PT Bangun Berkata Bersama has been listed as a vendor for Astra International. Responding to this achievement, PT Bangun Berkata Bersama strives continuously to renovate its systems, management teams, and builds an ongoing cooperation with the purpose of a significant expansion.



▶▶ ENGINE STARTER & BATTERY CHARGER MODEL SY - AUTO 100

Input Voltage	: 220V, Single Phase, 50-60HZ
Output Voltage	: DC 12V
Electric Current	: Charging mode - MAX60A Starting Engines mode - MAX300A
Rectifying Type	: Bridge Rectifying Type
Control Type	: Digital Microcomputer type
Insulation type	: A-Type, Double Insulation
Safety Device	: Overload protective device, Overheating sensor, Fuse breaker
Dimension	: (W)240mm x (L)390mm x (H)670mm
Net Weight	: 31kg
input power cord	: 5m
Charging cord	: 2.5m x 2



▶▶ CAMBER CASTING KING PIN MODEL SY - CCK201

Camber	: -5° ~ +5°
Caster	: -3° ~ 0 ~ +10°
King pin	: 0° ~ 16°
Dimension	: (W)90mm x (L)230mm
Weight	: 1.7Kg



▶▶ BRAKE FLUID TESTER

Power Source	: DC 9V Battery
Display Range	: 0 ~ 9%
Display	: LED
Dimension	: 245 (W) x 135 (L) x 25 (H) mm
Weight	: Approx. 200g



▶▶ BRAKE FLUID TESTER MODEL SY - JBC2103

Power Source	: AAA Battery * 2
Display Range	: 0 ~ 9%
Display	: LED
Dimension	: 70 (W) x 135 (L) x 22 (H) mm
Weight	: Approx. 200g




▶▶ BRAKE FLUID CHANGER MODEL SY - BC 111

Working way	: By air
The Working Pressure	: 6 ~ 10kg/cm ²
Suction pressure	: -50cmHG ~ -70cmHG
Storage tank capacity	: 1,5 L
Net Weight	: 1,25 kg
Dimension	: (W) 190 x (L) 180 x (H) 260mm



▶▶ TYRE INFLATOR MODEL SY - 300 A

Power	: 220V, 50-60HZ
Max Inlet Pressure	: 10 kgf/cm ²
Max Inflet Pressure	: 150 Psi Adjustable
Pressure Range	: 1 Psi
Accuracy	: 0.01 kgf/cm ²
Dimension	: (W) 365 x (D) 300 x (H) 108 mm
Weight	: 2.8 kg



▶▶ SPOT WELDER MODEL SY - SW7500

Input Voltage	: Single Phase 200~220V, 50/60Hz, 7,5KVA
Output Voltage	: 5-8 Volts
Safety device	: DC Low voltage driving gear
Dimension	: (W)250 x (L)300 x (H)650mm
Net weight	: 56.95 kg



▶▶ ARMATURE TESTER MODEL SY - AT11

Input voltage	: AC220V, Single Phase, 50/60Hz
AC ampere	: 2A
Applicable checking range	: 40~120
Checking voltage	: 24V
Dimension	: (W)160mm x (L)190mm x (H)250mm
Weight	: 5 Kg



▶▶ AUTOMATIC SPOT WELDER MODEL SY - ASW3300

Input voltage	: Single Phase 200-230V, 50/60Hz, 3,3KVA
Input Ampere	: 30Amp
Output Voltage	: 3-8 Volts
Output Ampere	: Max 2800 Amps
Work Capacity	: 0.8mm sheet metal x 2
Dimension	: (W) 250 x (L) 320 x (H) 220 mm
Weight	: 22 kg



▶▶ SPARK PLUG CLEANER MODEL SY - SPCT100

Power Sources	: AC220V, Single phase 50/60HZ
Working Air Pressure	: about 7 ~ 10kg/cm2
Abrasive Sand	: 350 g
Sand Size	: 60#
Testing Volt	: 15 KV
Dimension	: (W) 490 x (L) 280 x (H) 265 mm
Weight	: 9,3kg



►► DIESEL SMOKE OPACITY METER MODEL SY - OM501

Measuring item	: smoke opacity %
Principle	: light extinction method (partial flow sampling)
Light source	: green LED (565 nm)
Detector	: photodiode
Range	: 0 - 100 % (0 - 21,42 m-1)
Accuracy	: less ten 1%
Response	: 0,5 sec
Warm up time	: 6 minutes
Display time	: 4 times / second
Power	: 220 V AC
Temperature	: - 10 - 40 Celcius degree
Dimension	: 450 (W) x 200 (D) x 425 (H) mm
Weight	: 7 kgs
Option	: RPM meter, oil Temp, Hand terminal, Built in printer, Standard Filter
Connection to PC	: by RS 232 port



►► FOUR GAS ANALYZER MODEL SY - GA401

Measuring Item	: CO, HC, CO ₂ , O ₂ , (air surplus rate), AFR, NOX (optional)
Measuring Method	: CO, HC, CO ₂ : NDIR / O ₂ NOX : Electrochemical Cell
Measuring Range	: CO 0.0~9.99% 0.01% 4digit7segment LED 0.0~20.0% Co ₂ 0.1% 4digit7segment LED 0~2.000 4digit7segment LED λ 0.001 HC 0~9999ppm 1ppm 4digit7segment LED 0.00~25.00% O ₂ 0.01% 4digit7segment LED 0.0~99.0 AFR 0.1 4digit7segment LED
Repeatability	: Less than ±2% FS
Response Time	: Within 10 seconds (more than 90%)
Connection to PC	: by RS 232 port



►► TOE IN GAUGE MODEL SY-TRG2000

Max length of measurement	: 2000 mm
Min measurement scale	: 0,1 mm
Sleece scale	: 15 mm ~ 0 ~15 mm
Length	: 1220 mm
Weight	: 2 kg



▶▶ DIESEL & GASOLINE CARBON CLEANER SY-CC900

Power Source	: Diesel- DC 12V (Vehicle Battery) Gasoline , Throttle Body-By Air (3 Bar)
Pump	: Diaphragm
Flow Rate	: 2.5ℓ
Fuse	: 20A
Storage Tank	: Gasoline- 0.06ℓ, Diesel-3ℓ
Pressure	: Diesel Slide Control -0~60PSI, Gasoline Not Necessary
Filter Usage	: 50 Cars Per Filter
Dimension	: 500(W) x 470 (L) x1050 (H) mm
Weight	: Approx. 38kg




▶▶ TURNING RADIUS GAUGE MODEL SY - TRG45

Measuring Angle	: 0° ~ 45°
Dimension	: (W) 360 x (L) 430 x (H) 65mm
Weight	: 32 kg
A use	: From a passanger car to small size truck



▶▶ ENGINE START AND BATTERY QUICK CHARGER SP - SY150

Input Voltage	: Single phase, AC220V, 50/60Hz
Output Voltage	: 12V,24 V
Output Current	: Charge-300A, Boost - 1500A
Battery Capacity	: Max.3000AH
Rectification Type	: Class A, Double Insulation
Safety Device	: Automatic Circuit Breaker, Overheating Sensor
Dimension	: (W)600x (L) 390x (H) 990mm
Weight	: Approx.90kg
Standard Accessory	: 8 m Power Cable x 1pc 2,5m Charging cable with clip x 2pc truck, large scale equipment



▶▶ COMPENSATOR MODEL SY - CCT601

The Wheel applicable	: 13" ~ 18"
Dimension	: (W) 375 x (L) 200 x (H) 105 mm
Net Weight	: 2.85 kg



▶▶ TWO POST LIFT ROTARY MODEL SPOA-10

Rise	: 1981mm, 2064mm
Lifting Capacity	: 10,000 LBS (4536kg)
Motor Power	: 2HP
Voltage	: 220/380V, 3PH
Width Overall	: 3493 mm
Height Overall Standard	: 3569 mm
Min Bay Size	: 3658 x 7315 mm
Drive Thru Clearance	: 2416 mm
Floor to overhead switch	: 3423 mm
Reach (front arm min)	: 521 mm
Reach (front arm max)	: 1036 mm
Reach (rear arm min)	: 1019 mm
Reach (rear arm max)	: 1548 mm
Min adapter height	: 121 mm
Low step height	: 178 mm
High step height	: 260mm
Inside columns	: 2727 mm



▶▶ TWO POST LIFT ROTARY MODEL SPOA-82

Rise	: 1880 mm
Width Overall	: 3337 mm
Height Overall Standard	: 3556 mm
Drive Thru Clearance	: 2261 mm
Floor to overhead switch	: 3455 mm
Min adapter height	: 3" (76mm)
Low step height	: 6" (182mm)
Inside columns	: 2572 mm
Cylinder height	: 152 mm
Lifting capacity	: 3175 mm
Motor	: 2 HP / 220 - 390, 3ph
Time of full rise	: 45 second
Max load (poer arm)	: 170 lbs
Min bay side	: 3658 x 7315 mm



▶▶ SCISSOR LIFT ROTARY MODEL DS-35

Capacity	: 3500 Kg	Power Rating	: 3 kw
Stroke	: 1945 mm	Electrical connection	: 230/400V,
Total lenght	: 2120 mm	(3 phasen)	50Hz
Overall Width	: 2080 mm	Lifting time	: 35 s
Drive on Height	: 98 mm	Lowering time	: 40 s
Platform Length	: 1420-2120 mm	Weight	: 750
Platform Width	: 600 mm	Kg	
Interval	: 800 mm		



▶▶ ROTARY FOUR POST LIFT MODEL SM14

Max Wheelbase	: 182 1/2" (4636mm)
Rise	: 73 3/4" (1873mm)
Length Overall†	: 20' 9" (6325mm)
Width Overall**†	: 11' 1" (3378mm)
Inside of Columns**	: 117 1/2" (2985mm)
Between Front and Rear Columns	: 195 7/8" (4975mm)
Height of Columns	: 6' 10 1/8" (2086mm)
Width of Runways	: 20" (508mm)
Height of Runways	: 7" (178mm)
Width Between	: 43" (1092mm)
Runways	
Lifting Capacity	: 14,000 lbs. (6350kg)
Motor	: 2 HP
Voltage Single Phase	: 208v-230v
Time of Full Rise	: 55 seconds
Min. Bay Size	: 15' x 25' (4572 x 7620mm)



▶▶ SMART LIFT INGROUND MODEL SL-2101

Rise	: 80 3/4" (2051 mm)
Width Overall	: 93 1/2" (2375 mm)
Drive-Thru Clearance	: 83 3/4" (2127 mm)
Reach (Long arm min.)	: 25 1/4" (641 mm)
Reach (Long arm max.)	: 42 3/8" (1076 mm)
Reach (Short arm min.)	: 22 1/4" (565 mm)
Reach (Short arm max.)	: 36 3/4" (933 mm)
Reach (Overall arm min.)	: 61 1/2" (1562 mm)
Reach (Overall arm max.)	: 93 1/4" (2369 mm)
Min. Adapter Height	: 4 1/4" (108 mm)
Low Step Height	: 6 1/4" (159 mm)
High Step Height	: 9 3/4" (248 mm)
Lifting Capacity Overall	: 10,000lbs (4536 Kg)
Lifting Capacity (Per Arm)	: 2,500lbs (1134Kg)
Guide Piston Diameter	: 8 1/2" (216 mm)
Motor	: 2 HP
Voltage 3 Phase	: 380v - 220v
Time of Full Rise 10/30	: 45 second / 35 seconds
Min. Bay Size	: 11' x 24' (3353 x 7315 mm)



▶▶ DOUBLE SCISSOR LIFT MODEL RLP-77

Lifting capacity	: 7.700 lbs (3500 kg)
Maximum rise	: 78 - 3/4" (2000 mm) surface mounted 74 - 5/8" (1895 mm) recessed mounted
Lowered height	: 4 - 1/8" (105 mm)
Width overall	: 85" (2159 mm)
Overall length	: 85" (2159 mm)
Runway width	: 24 - 3/4" (629 mm)
Width between	: 23 - 5/8" (600 mm platform)
Platform length	: 59" (1499 mm) 85" (2159 mm) w/ ramp extended
Ramp length	: 13" (330 mm)
Motor/voltage	: Single phase - 4 HP, 60 Hz, 230 V
Time for rise	: 39 seconds
Compressed air connection	: 85 - 110 psi



▶▶ TWO POST LIFT ROTARY MODEL AT-07

Adapters	: Flip Up, Round, Truck and frame available
Capacity	: 7,000 lbs.
Rise	: 73 7/8"
Overall height	: 11' 8-1/2"
Required Ceiling Height	: 12'
Overall width	: 10' 2-7/8"
Drive through width	: 92"
Front Arm Min/Max	: 21-5/8"-43-1/2"
Rear Arm Min/Max	: 34-1/2"-58"
Min adapters height	: 3-5/8"
Voltage/amps	: 208v-230v
Motor	: 2 HP
Time of Full Rise/Decent	: 45 secs
Min. Bay Size	: 11' x 24'



▶▶ ROTARY ROLLING JACK MODEL RJ-7000

Rolling Jacks increase your service opportunities by lifting front, rear or all wheels of the runways for brake, tire, suspension and two or four-wheel alignment work. Rotary rolling jack feature:

- Hydraulic opperation with 2 locking position
- Drop in rubber adapters made with high durometer rubber. Sizes 1 1/2' (38 mm) and 3' (76 mm)
- Easy glide wheels roll smoothly in the track. A sweeper pushes debris away from the wheel
- 7000 Lbs capacity
- 4500 Lbs capacity also available



▶▶ DIRECT LIFT MODEL PRO9D

Capacity	: 9,000 lbs.
Overall Height	: 3620 mm
Lifting Time	: 45 seconds
Inside Column	: 2794 mm
Maximun Lift Height	: 2007 mm
Max pad height	: 120 mm
Overall Floor Width	: 3404 mm
Drive thru	: 2434 mm
Motor	: 2 HP, 220 - 380V, 3HP



▶▶ REVOLUTION LIFT MODEL RTP9

Capacity	: 4082 kg (9000 lbs)
Rise width extension	: 2045 mm
Rise without extension	: 1829 mm (72")
Overall height	: 2826 mm (111-1/4")
Overall width	: 3518 mm (138-1/2")
Drive through clearance	: 2470 mm (111")
Width inside columns	: 2819 mm (111")
Arm reach (min./max)	: 762 mm (60") 1175 mm (46-1/4")
Min adapters height	: 89 mm (3-1/2")
Drive-over height	: 38 mm (1-1/2")
Voltage/amps	: 208/230, 20 amps
Motor/phase	: 2 HP/22 HP/1Ø*
Min. ceiling height	: 2870 mm (113") (9'-5")



▶▶ ROTARY FOUR POST LIFT MODEL RSM4T

Capacity	: 4082kg (9000 lbs.)
Rise	: 1962mm (77-1/4")
Overall Length	: 5337mm (210-1/8")
Maximum Wheelbase	: 3861mm (152")
Overall Width	: 3276mm (129")
Overall Height	: 2221mm (87-7/16")
Width Inside Columns	: 2718mm (107")
Length Between Columns	: 4191mm (165")
Runway Tread Width	: 508 mm (20")
Width Between	: 1000 mm (39-3/8")
Runway Height	: 127 mm (5")
Rise Time	: 55 sec
Voltage/Amps	: 208/230, 20 Amps
Motor/Phase	: 1Ø*/2HP/60Hz



▶▶ BOXER TWO POST EE123

Type of lift	: Symmetrical
Capacity	: 3500 kg
Overall width	: 3402 mm
Width between columns	: 2790 mm
Drive-thru width	: 2554 mm
Overall height	: 3596mm
Under bar clearance	: 3384 mm
Pad height from floor	: 109 and 141 mm
Arm retracted length	: 781 mm
Arm extended length	: 1142 mm
Maximum lifting height	: 1806 mm
Lift time / Lower time	: 50 / 45 sec
Power Supply	: 380 VAC, 3PH, 50 Hz 220 VAC, 1PH, 50/60 Hz



►► CARTAR MOBILE LIFT

Retracted Height	: 115 mm / 4.5 inch (exclude 5' wheels)
Elevated Height	: 800 mm / 32 inch
Length when fully lowered	: 2.0 Meters / 78.5 inch
Width when arms retracted	: 1.05 Meters / 41.5 inch
Power Source	: Air Compressor
Max Lift Load	: 2,800 kg / 6160 lbs
Shipping Weight	: 285kg / 628 lbs
Oil Grade	: Hydraulic 46 grade
Oil Volume in Tank	: 5 litres / 1.3 gallons
Leaf Chain	: BL 534
Required Air Pressure	: 50 - 100 psi
Direction of Load	: Front, Rear or Side entry
Wearher Resistant	: Use inside or outside
Power Pack and Oil Tank	: Built in and Onboard

NOTES



►► SCISSOR LIFT GUANG-LI MODEL GL-35000 SCISSOR LIFT FOR WHEEL ALIGNMENT

Lifting capacity	: 3500 kg
Locking	: Double safety self locking protector
Overall width	: 2010 mm
Maximum rise	: 1780 mm
Accessories	: Double Jacking beam
Hydraulic pump	: Original Italy Pump
Cylinder	: Single cylinder pistons per runway



▶▶ DIGITAL WHEEL BALANCING MODEL CB-75

Rim diameter	: 1-28"
Max wheel weight	: 70kg
Max wheel diameter	: 1100mm
Rim width	: 1.5-20"
Rotating speed (car/truck)	: 140 rpm
Balancing precision	: $\pm 1g$
Power	: 90W
One balance time (20kg tire)	: 7S
Power supply voltage	: 100/230V 1ph
Packing dimension	: 990 x 760 x 1145mm
Net/gross weight	: 130/168kg
40" container load	: 72 sets



▶▶ CAR TYRE CHANGER MODEL 890N

Outside clamp	: 11 - 24"
Inside clamp	: 13 - 26"
Tire width	: 3 - 14"
Max wheel diameter	: 1250 mm
Working air pressure	: 8 - 10bar
Turntable rotation speed	: 6,5 rpm
Power supply voltage	: 220/380V
Power	: 0,75/1,1 Kw
Noise	: < 70dB
CTN size	: 1200 x 920 x 1050
Net/gross weight	: 239/269
Container loading	: 44



▶▶ WHEEL BALANCER MODEL CB-968

Rim diameter	: 10 - 25"
Max wheel weight	: 76 kg
Max wheel diameter	: 1100 mm
Rim width	: 1,5 - 20"
Balancing precision	: $\pm 1gr$
Motor Power	: 0,25 Kw
CTN size	: 1060 x 960 x 1180 mm
Net/gross weight	: 163/206
Container loading	: 48



▶▶ WHEEL BAL- ANCING MODEL CB-66

Rim diameter	: 1" - 28"
Max wheel weight	: 70 kg
Max wheel diameter	: 1100 mm
Rim width	: 1.5" to 20"
Rotating speed (car/truck)	: 140 rpm
Balancing precision	: $\pm 1g$
Motor Power	: 90 W
Power supply voltage	: 100/230 V 1 PH
One balancing time	: 7 seconds
Packing dimension	: 990 x 760 x 1145 mm
Net/gross weight	: 130/168 kg
40" container load	: 72 sets




►► MOTORCYCLE TYRE CHANGER MODEL M-806B

Outside climp	: 6 - 24"
Tyre width	: 3 - 12"
Max wheel diameter	: 960 mm
Working air pressure	: 8 - 10bar
Turntable rotation speed	: 6,5 rpm
Power supply voltage	: 220/380V
Power	: 0,75/1,1 Kw
Noise	: < 70dB
CTN size	: 980 x 760 x 950 mm
Net/gross weight	: 185/215
Container loading	: 72



►► TRUCK WHEEL BALANCER MODEL CB-460B

Rim Diameter	: 10—24"
Max. Wheel Diameter	: 1200mm
Max. Wheel Weight	: 200 Kg
Rotating Speed	: 100/200rpm
Motor power	: 0.25KW
CTN.size	: 1300×990×1130
Max. Wheel Weight	: 200kg
Rim Width	: 1.5—20"
Balancing Precision	: ±1g/±10g
Net Weight/Gross Weight	: 217/312 Container Loading in 40"
Quantity	: 42 units

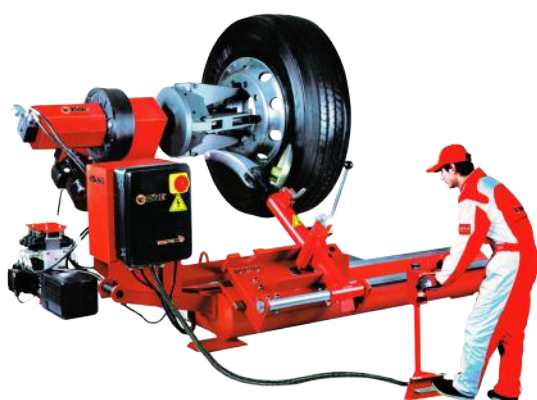

►► TRUCK TYRE CHANGER MODEL LC-588

Rim diameter	: 14 - 26"
Wheel weight	: 1000 mm
Max wheel diameter	: 1600 mm
Working pressure	: 130 - 150 bar
Hydraulic pump motor	: 1,5 Kw 380V, 3 ph - 50hz
Gear box motor	
Noise level	: <75dB
CTN size	: 2100 x 1650 x 930
Net/gross weight	: 585/739
Container loading	: 14



▶▶ TYRE CHANGER FLY SPEED MODEL FS-812

Swing arm design Semi Automatic
Power supply : 110V/220V/400V,
50Hz ~ 60Hz
Motor power : 0,75-1,1 KW
Air requirement : 8-10 bar / 116-
145 Psi
Bead breaker force : 2500KGF
Working noise : <70dB
Max tire diameter : 41"/1100mm
Max wheel width : 13"/330mm
Inside Clamping : 13"~24"
Outside Clamping : 11"~21"



▶▶ TYRE CHANGER FLY SPEED MODEL FS-850

Power supply : 110V/220V/400V,
50Hz ~ 60Hz
Motor power : 0,75-1,1 KW
Air requirement : 8-10 bar / 116-
145 Psi
Bead breaker force : 2500KGF
Working noise : <70dB
Max tire diameter : 41"/1100mm
Max wheel width : 13"/330mm
Inside Clamping : 13"~24"
Outside Clamping : 11"~21"



▶▶ TYRE INFLATOR FLY SPEED MODEL FS-302

Vehicle Applicable : Motor/car/truck
Power supply : 110V/220V/50-60Hz
Power : 40W
Air input pressure : ≤ 145Psi/10Bar
Air output pressure : 4.5Bar/65Psi
Operation tem : -20°C - +70°C
Measuring range : 5-101Psi / 0.3-7
Accuracy : ± 0.5 Psi/0.03 Bar
Display mode : LED
Dimension : 1350 x 400 x 300
Net weight : 10,5 kg
Packing size : 1390 x 420 x 380 (mm)
Gross weight : 14,5 kg



▶▶ GENERATOR NITROGEN FLY SPEED MODEL FS-8000

Vehicle Applicable : Truck	Supercharged
Power Supply : 220V/380V, 50 Hz, 3 phase	Nitrogen Output : ≤232psi / 16 bar / 1,6 Mpa
Power : 2.0 KW	Nitrogen Output : 160L/min(5.6cfm) @174psi/12bar
Nitrogen Purity : 95~99.5%	Truck Tyre : 15Tyres/Hour
Operation Temp : ±5°C - ±70°C	Dimension : 1700 x 930 x 640 mm
Compressed Air	Net Weight : 263 kgs
Pressure Required : <174psi / 12 bar / 1,2 Mpa	Packing Size : 1880 x 965 x 770 mm
Air Compressor	Gross Weight : 293 kg
Discharge rate : >1.08M3/Min	Storage Tank
No supercharge, Output	Packing Size : 620 x 1750 mm
Nitrogen pressure : 87psi / 6 bar / 0,6Mpa	Storage Tank Weight: 97 kgs



►► GENERATOR NITROGEN FLY SPEED MODEL FS-4000L

Vehicle Applicable	: Motorcycle, passenger car	Operation temp	: -20°C ± 70° C
Power supply	: 220V~50Hz	Measuring range	: 5~110Psi/ 0.3~8Bar
Power	: 60W	Accuracy	: ±0.5psi/0.03bar
Nitrogen Purity	: 95~99.5%	Display Mode	: LED display
Compressed Air Input Range	: ≤174Psi/12 Bar	Dimension	: 1420(H)×700(L)×510(W)mm
Nitrogen Output	: 66L/min(2.3cfm) @145psi/110bar	Net weight	: 128KG
Nitrogen Storage Tank	: 70L/18.5gal	Packing size	: 1560 x 760 x 615 mm
		Gross weight	: 175 Kg



►► GENERATOR NITROGEN FLY SPEED MODEL FS-6000

Vehicle Applicable	: Passenger, light truck
Power supply	: 220V - 50 Hz
Power	: 60W
Nitrogen Purity	: 95~99.5%
Compressed Air Input Range	: ≤174Psi / 12Bar
Nitrogen Output	: 100L / 31,5 bar
N2 Output Pressure	: ≤87psi / 6bar
Operation temp	: -20°C ± 70°C
Measuring range	: 5 - 110 psi / 0,3 - 8 bar
Inflator accuracy	: ± 1 psi / 0,07 psi
Display Mode	: LED / LCD
Dimension	: 1420×780×600mm
Net weight	: 160 kg
Packing size	: 1560 x 920 x 710 mm
Gross weight	: 180 kg



►► TYRE INFLATOR FLY SPEED MODEL FS-301

Vehicle Applicable	: Motor/car/truck
Power supply	: 220V - 50 Hz
Power	: 40W
Max input pressure	: <240psi/16,5 bar
Measuring range	: 14,5 - 21,7psi / 1 - 15 bar
Operation temp	: -20°C - ±70°C
Accuracy	: ± 1,0psi/0,07 bar
Display mode	: LED
Unit of measurement	: psi/bar/kpa
Display increments	: 1psi/0,1 bar
Dimension	: 465 x 230 x 120 mm
Net weight	: 7 kg
Standard fittings	: 10 m high pressure charge hose



►► GENERATOR NITROGEN FLY SPEED MODEL FS-3500N

Vehicle Applicable	: Car use	Nitrogen Output	: 660L/min(2.3cfm) @145psi/10bar
Power supply	: 220V / 50Hz	Nitrogen Storage Tank	: 70L/min
Motor Power	: 40W	N2 Output Pressure	: 4,7kg/cm2 , 58 - 100 psi
Nitrogen Purity	: 95~99.5%	Dimension	: 1300 x 630 x 450 mm
Compressed Air Input Range	: 8 - 10 kg/cm3 , 100 - 145 psi	Net weight	: 92 kgs
		Packing size	: 1440 x 730 x 560 mm
		Gross weight	: 110 kgs



▶▶ HELPING ARM MODEL RH-750

Power supply	: 110V/220V/400V, 50Hz ~ 60Hz
Motor power	: 0,75-1,1 KW
Air requirement	: 8-10 bar / 116-145 Psi
Bead breaker force	: 2500KGF
Working noise	: <70dB
Max tire diameter	: 41"/1100mm
Max wheel width	: 13"/330mm
Inside Clamping	: 13"~24"
Outside Clamping	: 11"~21"



▶▶ TYRE INFLATION GUN FLY SPEED MODEL FSD-201

Vehicle Applicable	: Motor/car/truck
Power supply	: 3V (1,5VX2)
Working temp	: -20°C - +70°C
Input air pressure	: <12bar/174psi
Measuring range	: 0,4 - 10,0bar/5 - 145psi
Differentiation	: 0,05bar/0,75psi
Accuracy	: ± 1% + 0,5psi
Display mode	: LCD
Dimension	: 280 x 90 x 75 mm
Net weight	: 0,5 kgs
Packing size	: 325 x 200 x 100 mm
Gross weight	: 0,9 kgs



▶▶ HELPING ARM MODEL LH-730

Power supply	: 110V/220V/400V, 50Hz ~ 60Hz
Motor power	: 0,75-1,1 KW
Air requirement	: 8-10 bar / 116-145 Psi
Bead breaker force	: 2500KGF
Working noise	: <70dB
Max tire diameter	: 41"/1100mm
Max wheel width	: 13"/330mm
Inside Clamping	: 13"~24"
Outside Clamping	: 11"~21"



▶▶ WHEEL BALANCER FLY SPEED MODEL FS-990

Power supply	: 110V/220V/50- 60Hz
Motor Power	: 0.2~ 0.25Kw
Balancing Accuracy	: 1 gr
Cycle time	: 8 sec
Rim width	: 1,5" - 20"
Rim diameter	: 12" - 24"
Wheel max. diameter	: 960 mm
Rotating Speed	: 215 r.p.m
Wheel max. weight	: 70 Kg
Gross weight with std acc	: 100 kg



▶▶ WHEEL BALANCER FLY SPEED MODEL FS-968

Power supply	: 110V/220V/50- 60Hz
Motor Power	: 0.2~0.25Kw
Balancing Accuracy	: 1 gr
Cycle time	: 8 sec
Rim width	: 1,5" - 20"
Rim diameter	: 12" - 24"
Wheel max. diameter	: 960 mm
Rotating Speed	: 215 r.p.m
Wheel max. weight	: 70 Kg
Gross weight with std acc	: 100 kg"



▶▶ GEOLINER 630

Camera System	: 2 HD Cameras, 5.1 mega pixels
PC System	: Mainboard plus Mini PC
Monitor Resolution	: 1080P
Track Width	: 48" - 96"
Wheel Base	: 79" - 180"
Wheel Clamp and Target Type	: 4 x AC100 with 8" x 8" targets
Rim Size	: 11" to 22" (optional to 26")
Vehicle Specifications	: 30+ years
Overall Dimension (L x W x H)	: 3100 x 2290 x 920mm
Regional Specifications	
Back up / Restore of Calibration and set up Data	



▶▶ WHEEL ALIGNMENT SYSTER I-GEOLINER PLATINUM EEWAKS753

Tire diameter	: 19" - 39" (48.3 cm - 99.1 cm)
Track width	: 48" - 96" (122 cm - 244 cm)
Wheel base	: 79" - 180" (201 cm - 244 cm)
Shipping weight	: 501 lbs (227 kg)
Power requirements	: 100 - 240 V 1ph 50/60Hz

Standard Accessories	
- Steering wheel holder	: 55502CP
- Brake pedal depressor	: 96CP
- Remote control	: EAK0289J23A
- Right height target (TIP)	: EAK0256J71A
- Two wheel chocks	: EAC0090J82A



▶▶ WHEEL ALIGNMENT SYSTER I-GEOLINER SILVER XD HOFMANN

Rim size	: 11" - 22" (27.94 cm - 55.88 cm)
Track width	: 48" - 96" (122 cm - 244 cm)
Wheel base	: 79" - 180" (201 cm - 457 cm)
Shipping weights	: 501 lbs (227 kg)
Power requirements	: 120/230V 1 Ph 50/60Hz AC100
Weight	: 4.9 - 5.2 kg (10.9 - 11.5 lbs)
Constraction	: Cast aluminium

Standard Accessories	
- wheel clamps & targets	
- steering wheel holder	
- brake pedal depressor	
- two wheel chocks	
- printer	



▶▶ TYRE CHANGER HOFMANN MONTY 3300-24

Configuration	: Tilt arm
Inner clamping range	: 12 - 22 inch
Outer clamping range	: 10 - 20 inch
Rim width	: 3 - 12 inch
Max. wheel diameter	: 1000 mm
Bead breaking range	: 40 - 340 mm
Compressed air supply	: 8 - 12 bar
Turntable speed	: 7.5 RPM
Space Requirement (D x W x H)	: 1700 x 1160 x 1850 mm
Weight	: 220 kg
Power supply	: 415V/3PH/50-60Hz; 230V/1PH/50-60Hz (special voltage available upon request)



▶▶ TYRE CHANGER HOFMANN MONTY 1275-24

Configuration	: swing arm
Inner clamping range	: 12 - 22 inch
Outer clamping range	: 10 - 20 inch
Rim width	: 3 - 12 inch
Max. wheel diameter	: 1000 mm
Bead breaking range	: 70 - 340 mm
Compressed air supply	: 8 -12 bar
Turntable speed	: 7.5 RPM
Space Requirement (D x W x H)	: 1220 x 1040 x 1790 mm
Weight	: 184 kg
Power supply	: 415V/3PH/50-60Hz; 230V/1PH/50-60Hz (special voltage available upon request)



▶▶ TYRE CHANGER HOFMANN MONTY 1000

Power supply	: 230V, 1Ph, 50/60 Hz & 415V, 3 Ph, 50/60 HZ
Outside clamping range	: 10 - 20"
Inside clamping range	: 12" - 22"
Maximum tire width	: 13" (330 mm)
Maximum tire diameter	: 1.000 mm
Maximum bead breaking width	: 330 mm
Chuck speed	: 6.5 RPM
Compressed air supply	: 8 - 10 bar
Number of pedals	: 3
Clamping cylinder diameter	: 70 mm



►► SCISSOR LIFT ALIGNMENT HOFMANN EELR734-SEA

Capacity	: 3.5 ton
Instalation recommendation	: Flush mount
Minimum height (primary)	: 330 mm
Maximum height (primary)	: 1860 mm
Runway length	: 4000 mm
Platform width	: 620 mm
Overall width	: 2160 mm
Rear slip plate length	: 1517 mm
Maximum wheel base-4 wheel alignment:	3280 mm
Minimum wheel base-4 wheel alignment:	1915 mm
Maximum wheel base-4 wheel alignment:	3480 mm
	(jack to compensate)
Maximum length	
(surface mount with ramp)	: NIL
Maximum length (flush mount)	: 4300 mm
Maximum front turntable length	: 476 mm
Plate length	: NA
Palte width / lifting widht	: NA
Lifting height	: 300 mm



►► WHEEL BALANCER HOFMANN 800 / 810

Resolution	: 1g
Measuring speed	: 200 rpm
Measuring time	: 6 - 10 s
Rim width (dynamic)	: 1" - 16" (3" - 16 ")
Maximum wheel widht	: 500 mm
	(400mm with wheel guard)
Rim diameter	: 12" - 22"
Maximum wheel diameter	: 1.016 mm
	(880mm with wheel guard)
Data entry	: manual
Maximum wheel weight	: 65 kg
Power supply	: 220 - 240V, 1Ph, 50/60Hz

NOTES



▶▶ WHEEL BALANCER HOFMANN MONTY 7100

Vehicles supported	: Passenger car/Light truck/SUV/ Off-road/ Motorcycles (Optional adaptor required)
Measuring Speed	: < 100 RPM
Balancing accuracy	: 1 g
Angular resolution	: 0.7
Start/stop balancing time	: 6 s
	(wheel 195/64R15)
Diameter of shaft	: 40 mm
Length of shaft	: 225 mm
Wheel lift max. load	: 70 kg
Power Supply	: 230V 1 PH, 50/60 Hz
Dimension L x W x H (wheel guard open)	: 1100 x 1005 x 1711
Net weight	: 70 kg
Semi-automatic data entry (SAPE)	
Rim diameter	: 8 - 25 inch
Rim width	: 9 - 15 inch
Manual data entry	
Rim diameter	: 8 - 32 inch
Offset	: 1 - 20 inch
Rim width	: 1 - 20 inch
Maximum wheel dimensions	
Max. wheel diameter	: 960 mm
Wheel width range	: 76 - 508 mm
Max. wheel weight	: 70 kg



▶▶ WHEEL BALANCER HOFMANN MONTY 7600

Vehicles supported	: Passenger car/Light truck/SUV/Off-road/ Motorcycles (Optional adaptor required)
Measuring Speed	: < 200 RPM
Balancing accuracy	: 1 g
Angular resolution	: 0.7
Start/stop balancing time	: 4.5 s
	(wheel 195/64R15)
Diameter of shaft	: 40 mm
Length of shaft	: 225 mm
Wheel lift max. load	: 70 kg
Power Supply	: 230V 1 PH, 50/60 Hz
Dimension L x W x H (wheel guard open)	: 1381 x 887 x 1834
Net weight	: 130 kg
Semi-automatic data entry (SAPE)	
Rim diameter	: 8 - 25 inch
Rim width	: 9 - 15 inch
Manual data entry	
Rim diameter	: 8 - 32 inch
Offset	: 1 - 20 inch
Rim width	: 1 - 20 inch
Maximum wheel dimensions	
Max. wheel diameter	: 1050 mm
Wheel width range	: 76 - 508 mm
Max. wheel weight	: 70 kg

NOTES



▶▶ SAMHONG WHEEL ALIGNMENT MODEL SMART CARPER 825

Operating system	: Intel Pentium 4, Windows 7
Measurement Method	: 4 target detect camera
Camera	: High-precision camera
Measurement Range	: Toe $\pm 50\text{mm}$ Caster $\pm 18.0^\circ$ Camber $\pm 8.0^\circ$
Measuring Precision	: Toe 0.01° Caster 0.02° Camber 0.02°
Power	: 100 - 240 V , 50 - 60 Hz 100~240 Vac / 200~ 240 Vac, 50~60Hz
Size	: Console 660(L) x 660(W) x 1120(H) mm



▶▶ SAMHONG WHEEL ALIGNMENT MODEL CARPER CCD-525

Wire or wireless/ bluetooth	
Computer	: Intel Pentium4 Dual Core
Sensor	: 4Heads, 8 CCD image sensor
OS	: Windows XP
Monitor	: 17" LCD monitor
Printing	: Deskjet printer
Wheel clamps	: 4-point clamps 11" - 22" range
Measuring Precision	: Setback 0.01° Toe 0.01° Caster 0.02° Camber 0.02°
Measuring Range	: Setback $\pm 2.0^\circ$ Total toe $\pm 50.0\text{mm}$ Caster $\pm 18.0^\circ$ Camber $\pm 8.0^\circ$
Transmission way	: Both wires or wireless communication
Rated voltage	: 100 - 240v, 50/60Hz
Rated Power	: 250W
Size	: 660(L)x660(W)x1,200(H)mm



▶▶ SAMHONG WHEEL ALIGNMENT MODEL CARPER CCD-325

Computer	: Intel Pentium4
Sensor	: 4Heads-8Toes, 8 CCD image sensors
OS	: Windows XP
Printing	: Deskjet printer
Monitor	: 19" LCD monitor & 17" monitor(Inside cabinet)
Wheel clamps	: 19" ~ 26"
Measuring Precision	: Setback 0.01° Toe 0.01° Caster 0.02° Camber 0.02°
Measuring Range	: Setback $\pm 2.0^\circ$ Total Toe $\pm 50\text{mm}$ Caster $\pm 18.0^\circ$ Camber $\pm 10^\circ$
Transmission way	: Both wires or wireless communication
SRated voltage	: 100 - 240v, 50/60Hz
Rated Power	: 250W
Size	: 660(L)x660(W)x1,00(H)mm



▶▶ REVELATION PREPARATION ROOM MODEL GL-500

Air enters the cabin through filtered plenum and is exhausted through floor holes, and then air goes outside. The roof equipped with filter holder and light system. It can be used simply for painting

Dimension : External Size (m) 3,7 x 7,1 x 3,52
Internal size : 3.48 x 6.0 x 2.7
Power : 7.0 kw



▶▶ REVELATION PREPARATION ROOM MODEL GL-600

Air enters the cabin through filtered plenum, and is exhausted outside through basement filtration; the roof is with filter holder and light. It can be used simply for painting.

Dimension : External size (m) 3.7 x 7.1 x 3.52
Internal size : 3.48 x 6.0 x 2.7
Power : 7.0 kw



▶▶ REVELATION SPRAY BOOTH MODEL GL RV-GL3

External size (m) : 7.0 x 5.3 x 3.5
Internal size (m) : 6.9 x 3.9 x 2.7
entrance width (M) : 3.0
Entrance Height (M) : 2.66
Fan Capacity (m3/h) : 24000
Air velocity (m/s) : 0.3-0.35
Air ventilation (times/h) : 332
Max Drying Temperature : 60°-80°
Oil Consumption (L/unit) : 6-8
Power (KW) : 16
Suitable Automobile Type : Car



▶▶ TERMOMECCANICA MODEL GL-1

SPECIFICATION:

With internal dimensions 7x4x2.80 with eksternal dimensions 7,10x4,10x3,25 masonry works & 3 rows of grids polyurethane panels
3-leaf front door 3MT wide in blue colour
Roof mounted lighting (4 light fixtures each side-8 light fixtures in total)
Plenum 500mm high
Electro/mech control box 220V 1 PH 50HZ/380V 3PH 50HZ
Zinc-coated in-take unit with 7.5KW(7.5HP) motor + fan pocket filters + 2 smoke passed heat exchanger + riello brand one stage oil burner for 180000 kcal/HR + electricfally operated in-take damper + total recirculation system on bake phase
Zinc-coated exhaust unit with 7.5KW(10HP) motor + fan + synthetic filters
Red liquid gauge
Bonnet hanger
Hinge cover for each door
Water indicator for filter & side service door
Metal basement (optional)
- Generator unit complete with; stainless steel heat exchanger and RIELLO Oil Burner of 180000 Kcak/h
- Anti Vibration joint.



▶▶ TERMOMECCANICA MODEL GL-2

SPECIFICATION:

With internal dimensions 7x4x2.80 without basement
With masonry works & 5 rows of grids polyurethane panels
3-leaf front door 3MT wide in blue colour
Roof mounted lighting (4 light fixtures each side-8 light fixtures in total)
Plenum 500mm high
Electro/mech control box 220V 1 PH 50HZ/380V 3PH 50HZ
Zinc-coated in-take unit with 7.5KW(10HP) motor + fan pocket filters + 2 smoke passed heat exchanger + riello brand one stage oil burner for 180000 kcal/HR + electricfally operated in-take damper + total recirculation system on bake phase
Zinc-coated exhaust unit with 7.5KW(10HP) motor + fan + synthetic filters
Red liquid gauge
Bonnet hanger
Hinge cover for each door
With vertical lights
Water indicator for filter & side service door
Backward inclined fan unit turbo-ventilator directly coupled to the motor
Metal basement (optional)

NOTES



▶▶ TERMOMECCANICA SPRAY BOOTH POWER THERM

SPECIFICATION:

With internal dimensions 7x4x2.80 without basement
with masonry works & 5 rows of grids polyurethane panels
3-leaf front door 3MT wide in blue colour
Side wall personnel door
Roof mounted lighting (4 light fixtures each side-8 light fixtures in total)
Plenum 700mm high
Side wall mounted lighting (3 light fixtures each sidewall - 6 light fixtures in total - each light fixture with 4 bulbs of 36 watt each - 864 watt in total)
Electro/mech control box 220V 1 PH 50HZ/380V 3PH 50HZ
Zinc-coated in-take unit with 6-pole 7.5KW(10HP) motor + turbine fan (direct drive)+ pocket filters + 3-smoke passes stainless steel heat exchange + riello brand one-stage oil burner for 180000 KCAL/HR + electrically operated in-take damper + total re-circulation system on baking phase
Zinc-coated exhaust unit with 6-pole 7.5KW(10HP) motor + turbine fan (direct drive) + synthetic filtes
Red liquid gauge
Air movement 28000 M3/HRv

NOTES



▶▶ TERMOMECCANICA PREPSTATION MODEL 104

SPECIFICATION:

Dimension 7x4x2.8 without basement
With masonry works & 5 rows of grids
with Plenum, with light, with poles, recycle system and electric damper
Exhaust Unit with 10 HP Motor + fan + filters
Control Box
Polyurethane panels on the back side
On the front left and right side manual curtain
3 Manual curtains and Sidewall at the back
Full Grids Gavanis



▶▶ RADIATOR CUP TESTER MODEL RC-3B

Meter Diameter : $\varnothing$ 50mm
 Max. Scale : 200kPa
 Min. Scale : 10kPa
 Pressurization capacity : 200kPa
 Accessories : Hose adapter, tubular adapter
 Total Weight : Approx. 1.350 g
 Option Adaptor : RC 3BS or RC 4 BS



▶▶ LOCK TYPE ADAPTOR MODEL RC-4BS

Filler neck type lock type (hook type)
 Inner diameter : 31mm Depth 9,5mm
 Applicable vehicle type for reference
 Japanese small-size car
 Total weight : Approx. 445 g



▶▶ LOCK TYPE ADAPTOR MODEL RC-3BS

Filler neck type lock type (hook type)
 Inner diameter : 31mm Depth 15,7mm
 Applicable vehicle type for reference
 Japanese small-size car
 Total weight : Approx. 480 g



▶▶ COMPRESSION GAUGE FOR GASOLINE MODEL GU-2C

Meter diameter : $\varnothing$ 60mm
 4 Max. Scale : 2,5 MPa (Approx. 25kgf/cm²)
 Min. scale : 0,1 Mps
 Overall Length : 970mm
 Accessories : Long stem 220mm
 Short stem 99mm
 14mm
 Rubber (spare) (2)
 V rubber (2)
 Case : Metal case
 (W) 290 x (D) 165 x (H) 70mm
 Total weight : Approx. 2.100 g




▶▶ COMPRESSION GAUGE FOR DIESEL MODEL DS-9

Meter diameter : $\varnothing$ 75mm
 Max. Scale : 70 g/cm²
 Min. scale : 2 kg/cm²
 Size of package : 335x220x50
 Weight : 3,800 g
 Total weight : Approx. 1.350 g




▶▶ HYDRAULIC GAUGE FOR LOW PRESSURE MODEL CT-2

Meter diameter : $\varnothing$ 60mm
 Max. Scale : 1500 kPa
 Min. scale : 50 kPa
 Overall Length : 14.70mm
 Accessories : Nipple (for low pressure)
 PT1/8, PT1/4
 Total Weight : Approx. 750 g



►► HYDRAULIC GAUGE FOR AUTOMATIC TRANSMISSION MODEL AT-3

Meter diameter : $\varnothing$ 60mm
 7 Max. Scale : 1500 Kpa
 Min. scale : 50 Kpa
 Overall Length : 14.70mm
 Accessories : Nipple (for low pressure)
 PT 1/8, Pt 1/4
 Total Weight : Approx. 750 g



►► COMPRESSION GAUGE MODEL DK4


ADAPTER	MANUFACTURER	TYPE
k-8	- UK Inter	- 2D92,4D92
k-9	- Komatsu	
k-10	- Germany Inter	
k-11	- Perkins	

Case : Metal Case W 290 x D165 x H70 mm
 Total weight : Approx. 3,400g



►► PRESSURE GAUGE FOR POWER STEERING MODEL PS-150

Meter diameter : $\varnothing$ 60mm
 7 Max. Scale : 15Mpa
 Min. scale : 0.5Mpa
 Overall Length : 1.660mm
 Case : Metal Case
 (W) 370 x (D) 230 x
 (H) 80mm
 Total Weight : Approx. 4.100 g



►► COMPRESSION GAUGE MODEL DK7

ADAPTER	MANUFACTURER	TYPE
k-1	- Cummins	- 855
k-2	- Komatsu	- 94-1
k-3	- Cummins	- 743
k-4	- Komatsu	- 105-1,105-2, 105-3
k-5	- Komatsu	- 120-11,130-1
k-6	- Komatsu	- 92,1
k-7	- Komatsu	- 155-4

Case : Metal Case W 370 x D270 x H55 mm
 Total weight : Approx. 6,400g



▶▶ BATTERY DIAGNOSTIC STATION MODEL GRX-3000

Cable Length	: 7-ft replaceable cables	Compliance	: ROHS, CUL
Applications	: Tests 6 and 12 volt batteries (including regular flooded, AGM and GEL batteries)	Languages	: English, Spanish, French-Canadian
Dimensions	: 18.0in L x 17.0in W x 9.7in H (45.7 cm L x 43.2 cm W x 24.6 cm H)	Housing Material	: Acid-resistant ABS plastic Integrated Data Card Slot and USB Port Optional Integrated Printer Optional Communications
Weight	: 49.5 lbs	Modules	: • Ethernet port • Wireless ports (WiFi, Bluetooth, Zigbee) • Serial ports to support features like a bar code reader or RFID wand
Operating Temperature	: 32°F–120°F (0°C–49°C)		
Display	: LCD graphics display		
Rating System	: DIN, EN, IEC, JIS, SAE		
Battery Range	: CCA, CA, MCA (Marine Cranking Amps)		
Charging Voltage	: Up to 17 volts		
Charging Current	: 0–50 Amps, 1 Amp resolution		



▶▶ BATTERY TESTER DIGITAL MODEL P-651

Display	: 5-line Text/Graphical Display	Voltage Range	: 1Vdc – 30Vdc
Backlit		Cable Length	: 4'/122 cm 10'/305cm
Operating Temperature	: 0°C to +50°C (32°F to +122°F)	Power Requirements	: Uses the power of the battery under test and 6 AA Internal Batteries
Test Range	: • CCA: 100-2000 BY 5 • CA: 100-2000 BY 5 • MCA: 100-2000 BY 5 • JIS#: By Part Number • EN: 100-2000 BY 5 • DIN: 100-1200 by 5 • SAE: 100-2000 by 5 • IEC: 100-1200 by 5	Languages	: English, Japanese, Chinese, Korean
		Housing Material	: Acid resistant ABS plastic
		Dimensions	: MDX-651P: 27cm x 10cm x 5cm (10.6" x 3.9" x 2.4")
		Weight	: MDX-651P: 771g (1.7lbs)



▶▶ BATTERY TESTER DIGITAL MODEL P-300

Display	: LCD text display	Cable length	: 21 in / 533.4 mm
Temperature compensation	: Tester prompted	Power requirements	: Uses power of battery under test or 9-volt battery
Operating temperature	: 32OF to 120OF / 0OC to 50OC	Voltmeter	: .9-16 Vdc, +/- 0.05 Vdc
Test range	: • 100-1400 CCA • 100-1400 SAE • 100-550 DIN • 100-900 EN • 100-550 IEC • JIS#	Languages	: English, Spanish, French-Canadian, Japanese
Built-in printer	: Powered by battery under test	Housing material	: Acid resistant ABS plastic
Voltage range	: Test 12-volt batteries down 1 volt	Dimantions	: 9in x 4 in x 2.5 in 230mm x 102mm x 65mm
		Weight	: 1.16 lb / 499 g



▶▶ BATTERY TESTER DIGITAL MODEL PBT-100

Display : - 3 LEDs: green/ yellow/red
 - 3 position LED voltage screen
 Warranty : - Standart Midtronics 1 year
 Operating Temperature: 0°F to 120°F (-18°C to 50°C)
 Power Requirements : Uses the power of the under test,
 a minimum of 8 volts is required
 Test Lead Clamps : Dual conductor kelvin clamps
 Housing Material : Acid - resistant ABS plastic
 Housing Dimension : 75 in x 3.5 in x 2.0 in
 (230 x 102 x 65 mm)
 Housing Weight : 16 oz (427 kg)
 Measure Range : from 200 - 850 CCA
 -Accurate battery test decision in seconds
 - No user interpretation required
 - Vlotmeter mode for testing both the starter and the
 charging system



▶▶ BATTERY TESTER DIGITAL MODEL PBT-50

Display : - 3 LEDs: green/ yellow/red
 - 3 position LED voltage screen
 Warranty : - Standart Midtronics 1 year
 Operating Temperature: 0°F to 120°F (-18°C to 50°C)
 Power Requirements : Uses the power of the under test,
 a minimum of 8 volts is required
 Test Lead Clamps : Dual conductor kelvin clamps
 Housing Material : Acid - resistant ABS plastic
 Housing Dimension : 75 in x 3.5 in x 2.0 in
 (230 x 102 x 65 mm)
 Housing Weight : 16 oz (427 kg)
 M2.3-30 Amp/hr, 10-500 CCA
 - Motorcycle an RV batteries
 -Accurate battery test decision in seconds
 - Simple, reference number based testing
 - Test discharged batteries



▶▶ BATTERY TESTER DIGITAL MODEL PBT-200NN

Weight : 0.427kg
 Warranty : 12 months
 • Tests batteries from 200 – 850 CCA
 • Accurate test decision in seconds
 • High/low voltage capture for starter/charging system
 testing
 • No user interpretation required
 • Bad cell detection
 • Voltmeter mode for starter and charging systems

NOTES



►► WASTE OIL SUCTION / GRAVITY DRAINERS TYPE OE44060

Combination air-operated oil suction-drainer with wheel-mounted 65-litre tank, equipped with : level gauge, side collection bowl, removable tool tray P/N OE44060 set of probes



►► WASTE OIL GRAVITY DRAINERS TYPE OE42065

Waste Oil Drainer with wheel-mounted 65-litre tank, equipped with : Level gauge, collection bowl with oversize funnel, antislash screen/filter, removable tool tray.



►► WASTE OIL GRAVITY DRAINERS TYPE OE42090

Waste Oil Drainer with wheel-mounted 90-litre tank, equipped with : Level gauge, collection bowl with oversize funnel, antislash screen/filter, removable tool tray.



►► WASTE OIL SUCTION / GRAVITY DRAINERS TYPE OE44090

Combination air-operated oil suction-drainer with wheel-mounted 90-litre tank, equipped with : level gauge, side collection bowl, removable tool tray P/N OE45560 set of probes.



►► PNEUMATIC OIL DISPENSERS TYPE OE33024 (24125)

Pneumatic oil dispenser, with wheel-mounted 24-litre tank, equipped with : level gauge, P/N OE24891 antislash tunnel, oil control valve with flexible terminal.



►► MANUAL OIL DISPENSERS TYPE OE32024

Manual oil dispenser, with wheel-mounted 24-litre tank, equipped with : level gauge, P/N OE24891 antislash tunnel.



▶▶ PNEUMATIC OIL DISPENSERS TYPE OE33016/OE24116

Pneumatic oil dispenser, with wheel-mounted 16-litre tank, equipped with : level gauge, P/N OE24891 antispash funnel, oil control valve with flexible terminal.



▶▶ 13 KG AIR-OPERATED GREASE PUMP TYPE OE68213

Air-operated grease pump R 50:1, wheel mounted, equipped with : TANK 13 kg, grease follower plate, P/N 935/4 - 1/4" -4 m, P/N OE62141 air pump R 50:1, P/N OE66892 NIPPLE 1/4" x 3/8" - M/M, P/N OE66888 grease gun with flexible terminal.



▶▶ INDUSTRIAL HOSE REEL WITH ABS SHOCK PROOF DRUM TYPE OE440/41

Fixed hose reel S.440 enclosed version with abs shock proof drums, For oil-antifreeze similar products 150 bar HOSE 10 m Ø 1/2"



▶▶ INDUSTRIAL AIR OPERATED PUMP S 900 TYPE OE91C/111

PUMP S.900, R 11 : 1 - 30 l/min WITH SEALS IN "PU" AND SUCTION TUBE 940 mm AIR INLET : F 1/2" bsp FLUID OUTLET CONNECTION : F 1/2" bsp AIR MAX PRESSURE : 8 bar MAX AIR CONSUMPTION 8 bar : 1700 l/min LENGTH SUCTION TUBE : 940 mm SUCTION DIAMETER : 45 mm



▶▶ AIR OPERATED PUMPS FOR OIL & SIMILAR S.650 TYPE OE36096 (OE36167)

PUMP S.650, R 5:1 - 21 l/min, FOR DRUMS 180 - 20 kg WITH SEALS IN "NBR", SUCTION TUBE 940 mm AND BUG ADAPTOR AIR INLET CONNECTION : F 1/4" bsp FLUID OUTLET CONNECTION : F 1/2" bsp AIR WORKING PRESSURE : 6 -8 bar



▶▶ GUN FOR OIL & SIMILAR S.1/2"-30TP TYPE OE37728

Oil gun with digital-litre-counter F 1/2" inlet swivel joint, filter, flexible terminal and semiautomatic drip-catcher nozzle Ø 16 MM



▶▶ AIR OPERATED PUMPS FOR OIL & SIMILAR S.600 TYPE OE35196 (OE35567)

PUMP S.650, R 5:1 - 21 l/min, FOR DRUMS 180 - 20 kg WITH SEALS IN "NBR", SUCTION TUBE 940 mm AND BUG ADAPTOR AIR INLET CONNECTION : F 1/4" bsp FLUID OUTLET CONNECTION : F 1/2" bsp AIR WORKING PRESSURE : 6 -8 bar



▶▶ RANDOM ORBITAL PALM SANDER SELF RH-353A

Velcro	: √
Ø orbit	: 3mm
Ø backing pad	: 150mm
Working pressure	: 6,2/90 bar
Max consumption air	: 340 l/min
R.P.M.	: 0-11.000
Weight	: 0,8 Kg
Speed control	: √
Air inlet thread	: 1/4" GAS
Wheel spindle thread	: M8-F
Central vacuum	: √



▶▶ RANDOM ORBITAL PALM SANDER CENTRAL RH-326A

Velcro	: √
Ø orbit	: 6 mm
Ø backing pad	: 125 mm
Working pressure	: 6,2/90 bar
Max consumption air	: 340 l/min
R.P.M.	: 0-11.000
Weight	: 0,8 Kg
Speed control	: √
Air inlet thread	: 1/4" GAS
Wheel spindle thread	: M8-F
Central vacuum	: √



▶▶ RANDOM ORBITAL PALM SANDER SELF RH-356T

Velcro	: √
Ø orbit	: 6 mm
Ø backing pad	: 150mm
Working pressure	: 6,2/90 bar
Max consumption air	: 340 l/min
R.P.M.	: 0-11.000
Weight	: 0,8 Kg
Speed control	: √
Air inlet thread	: 1/4" GAS
Wheel spindle thread	: M8-F
Central vacuum	: Generation automatic



▶▶ RANDOM ORBITAL PALM SANDER CENTRAL RH-329A

Velcro	: √
Ø orbit	: 9 mm
Ø backing pad	: 125 mm
Working pressure	: 6,2/90 bar
Max consumption air	: 340 l/min
R.P.M.	: 0-11.000
Weight	: 0,8 Kg
Speed control	: √
Air inlet thread	: 1/4" GAS
Wheel spindle thread	: M8-F
Central vacuum	: √



▶▶ RIGHT ANGLE POLISHER LH76P

Ø Backing Pad	: 75 MM
Working Pressure	: 6,2/90 Bar
Max Consumption Air	: 644 L/Min
R.P.M.	: 5000
Weight	: 1 Kg
Wheel Spindle Thread	: 3/8" 20T Male
Side Handle	: √
Air Inlet Thread	: 1/4" Gas
Convenyor Air Hose	: √
Backing pad supplied	: 9P26, 058



▶▶ RIGHT ANGLE POLISHER LH18ENS

Ø Polishing Foam	: 200mm
Power	: 1100 W
R.P.M	: 700 - 1850
Weight	: 2 Kg
Speed Control	: √
Wheel Spindle Thread	: M14-M
Shaft Locking Button	: √
Side Handle	: √



▶▶ RANDOM ORBITAL POLISHER LHR-21 ES/DLX

- 1 X LHR 21ES orbital polisher
- 1 X BigFoot tools bag
- 1 X Polishing compound 250 ml COARSE (cod. 9.BFZEPHIR250)
- 1 X Polishing compound 250ml MEDIUM (cod. 9.BFQUARZ250)
- 1 X Polishing compound 250 ml FINE (cod. 9.BFKERAMIK250)
- 1 X Polishing compound 250 ml ULTRA (cod. 9.BFDIAMOND250)
- 1 X Foam polishing pads COARSE Ø 150-180mm Ø 6" - 7" in (cod. 9.BF180H)
- 1 X Foam polishing pads MEDIUM Ø 150-180mm Ø 6" - 7" in (cod. 9.BF180J)
- 1 X Foam polishing pads FINE Ø 150-180mm Ø 6" - 7" in (cod. 9.BF180M)
- 1 X Foam polishing pads ULTRAFINE Ø 150-180mm Ø 6" - 7" in (cod. 9.BF180S)
- 4 X Coloured microfiber cloths (cod. 9.BF9010/4)
- 1 X BigFoot apron



▶▶ RANDOM ORBITAL POLISHER LHR 75 E/DLX

- 1 X LHR 75E MINI Random orbital polisher
- 1 X BigFoot tools bag
- 1 X Polishing compound 250 ml COARSE (cod. 9.BFZEPHIR250)
- 1 X Polishing compound 250 ml FINE (cod. 9.BFKERAMIK250)
- 2 X Foam polishing pads COARSE Ø 80-100 mm Ø 3"-4" in (cod. 9.BF100H)
- 2 X Foam polishing pads FINE Ø 80-100 mm Ø 3" - 4" in (cod. 9.BF100M)
- 4 X Coloured microfiber cloths (cod. 9.BF9010/4)
- 1 X BigFoot apron



▶▶ MINI RANDOM ORBITAL POLISHER LHR 75

Speed control	: √
Max consumption air:	320 l/min
Weight	: 0,650 Kg
R.P.M.	: 0 - 11000
Working pressure	: 6 Bar
Ø orbit	: 15 mm
Ø backing pad	: 75mm



▶▶ ORBITAL SANDER WITH DUST EXTRACTION SLP-41A

Ø orbit	: 4,8mm
Dimensions	: 400x70mm
Working Pressure	: 6,2/90 Bar
Max Consumption Air:	400 L/Min
R.P.M	: 4000-10000
Weight	: 2,4 kg
Air Inlet Thread	: 1/4" Gas



▶▶ ORBITAL PALM SANDER RE-21ACM

Ø orbit	: 3mm
Dimensions	: 80x130 mm
Working Pressure	: 6,2/90 Bar
Max Consumption Air:	360 L/Min
R.P.M	: 0-11000
Weight	: 0,87kg
Air Inlet Thread	: 1/4" Gas
Patin fourni	986.007MH



▶▶ COMPLETED MOBILE DUST EXTRACTION UNIT KS 260 EPNS

Power	: 2x1000 W
Weight	: 26kg
Max. Power Socket	: 2x800, 1x1600
Vacuum	: 2000 mm/H ₂ O
Noise	: 72 dB(A)
Tank Capacity	: 65 L
Flow Capacity	: 260 m ³ /h
Filter Surface	: 2,1m ²
Tools	: 2 nr
Electric Tools Socket	: 2 nr
Air Quick Couplings	
Tools	: 2 nr
Working Pressure	: 6 Bar
Max. Compressed Air	
Capacity	: 1450 l/min
ID Vacuum Nozzle	: 50 mm



▶▶ PROFESSIONAL VACUM CLEANERS S145EPL

Power	: 1x1200 W
Weight	: 13.5kg
Max. Power Socket	: 1x2400
Vacuum	: 2000 mm/H ₂ O
Noise	: 67 dB(A)
Tank Capacity	: 45 L
Flow Capacity	: 165 m ³ /h
Suitable for dust class	: L
Filter Surface	: 1 m ²
Tools	: 1 nr
Electric Tools Socket	: 1 nr
Air Quick Couplings	
Tools	: 1 nr
Working Pressure	: 6 Bar
Max. Compressed Air	
Capacity	: 1450 l/min
Automatic Filter	
Cleaning	: √
ID Vacuum Nozzle	: 50 mm
Liquid Sensor	: √



▶▶ RANDOM ORBIT POLISHER LHR 21ES

Ø Backing Pad	: 150 mm
Ø Orbit	: 21 mm
Power	: 500 W
R.P.M.	: 2000 - 4200
Weight	: 2.6 Kg
Speed Control	: √
Spindle Thread	: M8-F
Backing Pad Supplied	: 981.321 N



▶▶ SOFT INTERFACE VELCRO MULTIHOLE 150MM

Fine	: √
Velcro interface	: √
Backing pad thread	: M8
Q.ty in pack	: 5
Tool	: 106/109/112 ER-RH-BR
Holes pad	: Multihole
Ø mm	: 150



▶▶ X-CUT FOAM ABRASIVES 125MM P2000



▶▶ HQ 400 FILM ABRASIVE 150 MM

HQ 400 FILM ABRASIVE 150MM P 400
HQ 400 FILM ABRASIVE 150MM P 600
HQ 400 FILM ABRASIVE 150MM P 800
HQ 400 FILM ABRASIVE 150MM P 120
HQ 400 FILM ABRASIVE 150MM P 220
HQ 400 FILM ABRASIVE 150MM P 2000



▶▶ HQ 400 FILM ABRASIVO 80X130 P120

HQ400 FILM ABRASIVO 80X130 P120
HQ400 FILM ABRASIVO 80X130 P220
HQ400 FILM ABRASIVO 80X130 P280
HQ400 FILM ABRASIVO 80X130 P320



▶▶ VELCRO POLISHING FOAM FINE 100 MM BF 100J/50 MEDIUM

Tool	: LHR 75
Velcro interface	: ✓
Medium	: ✓
Ø mm	: 80/100
1 Carton	: 50 pads



▶▶ VELCRO POLISHING FOAM FINE 100 MM BF 100M/50 FINE

Velcro interface	: ✓
Fine	: ✓
Ø mm	: 80/100
1 Carton	: 50 pads



▶▶ VELCRO POLISHING FOAM FINE 180 MM BF 180J/50 MEDIUM

Tool	: LHR21ES/KIT
Velcro interface	: ✓
Medium	: ✓
Ø mm	: 150/180
1 Carton	: 50 foams

NOTES



▶▶ NAGASAKI MODEL ML 800

NAGASAKI Transmission Lift
Model : ML800
Capacity : 800 kg
Weight : 75 kg
Lifting Height : 890 mm
Length : 800
Width : 850



▶▶ NAGASAKI MODEL M-800

Type : M800
Capacity : 800 kg
Weight : 70 kg
Lifting Height : 585 mm



▶▶ NAGASAKI HYDRAULIC GARAGE JACK

Model : NSG-3 and NSG-5
Capacity : 3 tons and 5 Tons
Weight : 70 kg and 116 kg
Lifting Height : 460 mm and 410 mm
Length : 1340 mm and 1520 mm
Width : 335 mm and 380 mm



▶▶ HYDRAULIC PRESS


Model : NSP-15
Capacity : 15 Ton
Height : 1,650 mm
Width : 800 mm
Floor Area : 860x750 mm
Weight : 190 kg



▶▶ MULTIFUNCTIONAL SHORTWAVE INFRARED CUR- ING LAMP FY-1W


Made from aluminium alloy and 304 grade bright stainless steel reflector
Equipped with VPOWER's 21" quartz short wave infrared halogen lamps
Able to display input voltage with mechanical time settings

Power supply of 200-240V, 50/60Hz and 2x1100W or 1x1100W
Curing area of 800x800mm 800x500mm
Temperature range of 40°C - 100°C
Adjustable timer of 0min-60mins

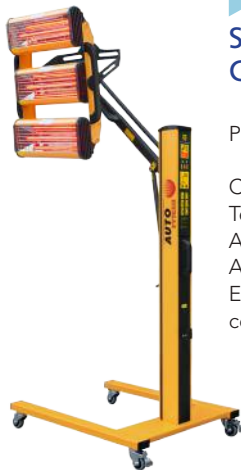

▶▶ MULTIFUNCTIONAL SHORTWAVE INFRARED CURING LAMP FY-3AL

Power supply : 200-240V, 50/60Hz, 3x1100W
Curing area : 1200x1000 mm
Temperature range : 40°C-100° C
Adjustable timer : 0 min-60 mins
Automatic overweight protection,
Each emitter can be independently controlled

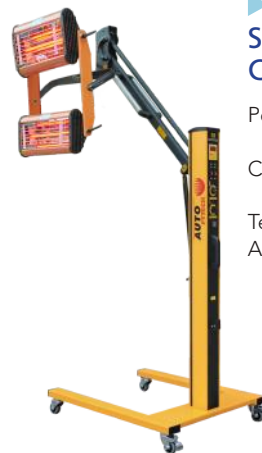

▶▶ MULTIFUNCTIONAL SHORTWAVE INFRARED CURING LAMP FY-2200W

Power supply : 200-240V, 50/60Hz, 2x1100W or 1x1100
Curing area : 800x800mm
800x500mm
Temperature range : 40°C-100° C
Adjustable timer : 0 min-60 mins

PULI & HPPM



▶▶ ELECTRIC OIL EXTRACTOR HD-2350

Power Supply : AC220V , 50/60 HZ
Motor Power : 300 W
Perspex cylinder capacity : 12 Liter
Release pressure : 5 bar / 72 PSI
Range of application : Engine Oil and other waste oil
Working pressure : 40 - 60°C
Package dimension : 430 x 475 x 1200 mm



▶▶ INJECTOR CLEANER PULI HPPM HP7

Power Supply : AC220V ± 10%, 50-60 Hz ± 0.5
Environmental magnetic intensity : < 400A/M
Ultrasonic power : 100 W
Injector operating frequency (RPM) : 0-700 rpm, variable in 50 rpm
Injector pulse : 0-9900 rpm; variable in 100 pulse
Spray time : 0-10 min
Pulse width (PMW) : 0-20ms in 0.1ms increments
System pressure : 0-0.6MPA



▶▶ TRANSMISSION FLUID OIL EXCHANGER GD-322

Power : AC220V /50HZ/1 phase 350W
Working Pressure : 80 - 120 PSI
Suit for : Gasoline / diesel vehicles
Meas : 650 x 520 x 1160 mm
G.W : 60kgs
Include : Transmission fluid exchanger unit with fitting, Pressure fill/ return hose (2) fluid collecting bottles (24) assorted fitting / adapters (8) assorted hoses with clamp & O-rings Tool Box

CADDY & TROLLEY SYSTEM



▶▶ TOOLBOX STAND



▶▶ ENGINE STAND
UNIVERSAL



▶▶ TYRE ROTATION
TROLLEY



▶▶ PNEUMATIC
STAINLESS STEEL
CADDY



▶▶ MOP
SMART CADDY



▶▶ EXPRESS
MAINTENANCE
CADDY



▶▶ QUICK SERVICE
CADDY



▶▶ TROLLEY ROUND
CADDY



▶▶ INSPECTOR DESK
CADDY

SUPPORTING EQUIPMENT



▶▶ JOHSAI ME-1B DWELL P/S TACHO TESTER

Applicable engine : 2,3,4,5,6, & 8 cylinder, 4cycles gasoline engine, 2cycles gasoline engine, Rotary engine

Measuring Items & Ranges : cam angle : 2,3,4,5,6,8 cylinder Engine Revolutions 0-1,500r.p.m BPR 0-7,500r.p.m

Power Source : DC6V by dry battery SUM-3x4 pcs
Dimensions : 221mm(W) x 142mm(D) x 46mm(H)
Weight : approx.1.05kgs



▶▶ JOHSAI ENGINE TURNER MODEL EA-800

Applicable engine : 2,3,4,5,6, & 8 cylinder, 4cycles gasoline engine with a DC 12V

Measuring Items & Ranges : cam angle, Engine Revolution, point resistance, Ignition Timing

Power Source : DC 12 Battery
Dimensions : 484mm(W) x 266mm(D) x 289mm(H)
Weight : approx.9.0kgs



▶▶ BELT TENSION GAUGE MODEL OTC EA 6673

SPX OTC Belt Tension Gauge
Testing belt capability : 30LBS - 180 LBS



▶▶ JOHSAI ME-2R VOLT AMPERE REGULATOR TESTER

Applicable engine : Any Gasoline & Diesel Engine

Measuring Items & Ranges : AC Voltage (accuracy within 5% of full scale)
(0~25V,0~50V,0~100V, 0~250V, 0~500V)
AC Amperage (accuracy within 5% 0,5A of full scale)
(-5~0~25A, -10~0~50A,-20~0~100A,-50~0~250A,-100~0~500A)
DC Voltage (accuracy within 3% of full scale)
(0~25V,0~50V,~0~100V,0~250V,0~500V)
AC Voltage (accuracy within 3% 0,5A of full scale)
(0~25V,0~50V,0~100V, 0~250V, 0~500V)

Power Source : DC6V by dry battery SUM-3x4 pcs
Dimensions : 221mm(W) x 142mm(D) x 46mm(H)
Weight : approx.0.8kgs



▶▶ CEBORA SPOTTER 2500 MULTI PURPOSE SPOTTER

Power input : 400V 50Hz
Max Installed power : 6000W
Fuse rating : 10A
Current range : 3000 A max
protection class : IP 23
Nett weight : 30 kg
Dimensions : (L) 207 x (W) 437 x(H) 411 mm

SUPPORTING EQUIPMENT



▶▶ AUTO TECH ATT MINI INJECTOR CLEANER

Fuel tank capacity	: 2,4 L
System Flow	: 4 L/minute
System Pressure	: 0-6 kg/cm ²
Power	: 220V, 50Hz, 500W
Intensity magnetic field	: less than 400 A/m
Rotate Speed	: 0-9950 r/min
Pulse width	: 0-20 ms
Count	: 0-9950
Dimensions	: 39 x 48 x 43 cm
Weight	: 22 kg
Test tube capacity	: 4 x 100 ml



▶▶ WASHER WELDER YASHIMA Y-550Q JAPAN

Model	: YS50
Input voltage	: AC220-240volt 50/60Hz
Maximum Input Capacity	: 17 KVA
Control Method	: thyristor control
Supply Cable	: 8m 5,5 Sq
Out put Cable	: 1,8m 60 Sq
Dimension	: 60x390x560 mm
Weight	: 33 Kg



▶▶ JOHSAI TIMING LIGHT MODEL FL-500

Power Source	: Dry Battery 3V, SUM-1 x 2 pcs
Sensor	: clip on the no. 1 cylinder plug cable
Sensor lead	: 1 m
Dimensions	: 48mm (W) x 46mm (D) x 245mm (H)
Weight	: approx 0.52 kgs



▶▶ TRIENS CORD REEL MODEL SLR 3810


Wire	: 1,25 mm x 3
Length	: 10 m
Dimensions	: 314 x 290 x 164 mm
Body Weight	: 4 kg



▶▶ TRIENS HOSE REEL MODEL SHR 2810 Z

Inner diameter	: 6,5 mm
Length	: 10 m
Dimensions	: 314 x 290 x 152 mm
Body Weight	: 3,5 kg

SUPPORTING EQUIPMENT



▶▶ ENERGY BOX 2



▶▶ ENERGY BOX 3

WASHING EQUIPMENT



▶▶ CNP PUMP TYPE CDLF 4-22

Driving motor	: 4.0 kw , 5.5 hp
Cap.	: 5-7,5 M3/ Hr
VOLT	: 390 V
Head	: 155 M
Pressure	: 16 Bar
In/ Outle	: 1,5"
Power	: 4 KW/ 5,5 HP/ 380 V/ 3 Phase/ 50 HZ/ 2950 RPM
Weight	: 59 kg
Size	: B1 846 B2 335 B1+B2 1181 D1 230 D2 188



▶▶ LAVOR HYPER ARES IW STATIC PROOF WET & DRY VACUUM CLEANER 20 LT, S/S

Voltage	: 220-240V ~ 50-60Hz
N° motors – power (max)	: 1-1200 1400 W silenced two stage motor
Column depression	: 21.6 kPa/2200 mmH ₂ O
Air suction	: 52 l/s
Total volume/dust/liquid	: 20 l/14 l/16 l
Dimension/weight	: 34.5×34.5×66 cm / 8 kg



▶▶ POWER LIFT SINGLE POST LIFT

Capacity	: 4000 kg
Plunger diameter	: 270 mm
Rise	: 1740 mm
Adapter Reach	
minimum front	: 397 mm
minimum rear	: 397 mm
maximum front	: 936 mm
minimum rear	: 936 mm



▶▶ SNOW WASH TANK STAINLESS STEEL

Capacity	: 80 L
Air Input Pressure	: max 3 bar



HEAD OFFICE

JAKARTA

Perkantoran Florencia Blok A No. 8, Bukit Gading Mediterania
Jl. Boulevard Bukit Gading Raya, Kelapa Gading - Jakarta 14240
Ph. +6221 4585-4850; +6221 4586-5567; +6221 451-5201
Fx. +62 21 451 5176

SURABAYA

Jl. Kendang Sari Gang Lebar No. 81, Surabaya
Ph. +62 31 9984 1588 / 0896 624 18199
Fx. +62 31 3770 090

SEMARANG

Jl. Kedung Mundu Raya No. 113A, Semarang
Ph. +62 851 0515 1966, +62 851 0375 5410
Fx. +62 24 7015 5410

